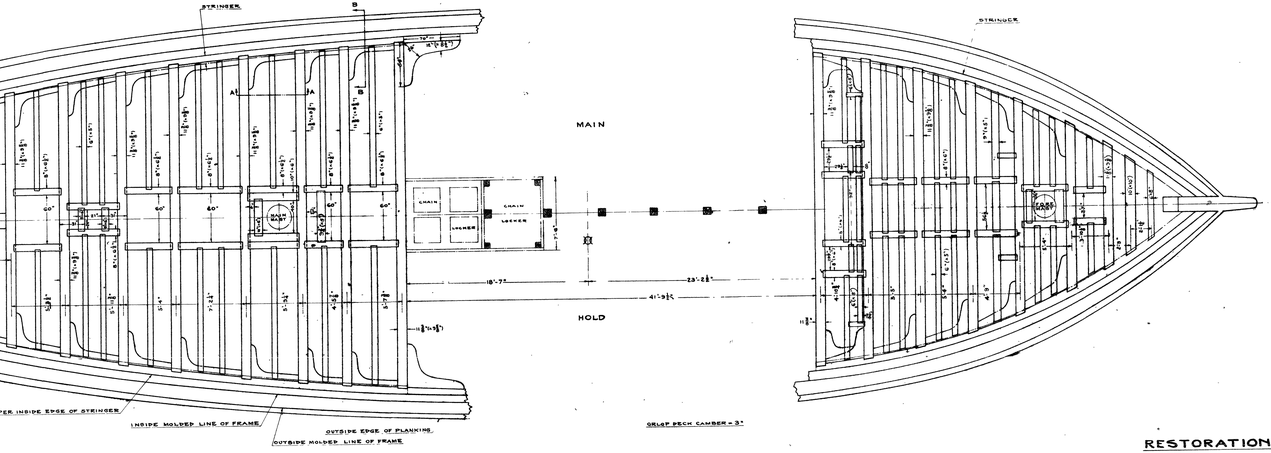

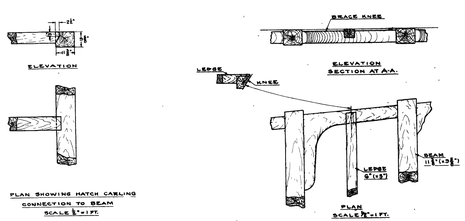



NOTE

THE DETAIL CONSTRUCTION OF THE ORLOP DECKS AS SHOWN ON THIS PLAN HAS BEEN OBTAINED BY TAKING MEASUREMENTS ON THE SHIP.

THE HALF BREADTHS TAKEN FROM THE SHIP WERE TAKEN TO THE UPPER INSIDE EDGE OF STRINGER.

IN CHARGE OF WORK J.A.LORD LIEUT (C.C.) U.S.N.

DRAWN BY Wm. Dillman

TRACED BY [illegible]

CHECKED FROM WORK J.C.GAMBLE

APPROVED BUREAU C.&R. LETTER 1 K 21/FS (DA) OF FEB. 17, 1927.

C.&R. NO. 135458

RESTORATION 1927-1931

CORRECTED FOR FINISHED PLAN

U.S. FRIGATE CONSTITUTION

ORLOP DECKS

(PLANKING REMOVED)

NAVY YARD, BOSTON. DEC. 1926.

SCALE-¼"=1 FT.

APPROVED FOR MANAGER

LIEUT. (C.C.) U.S.N.

SUPT. OF RESTORATION.

NO. 19506.

DWG. 19506

DWG 19506